

# BenchPro™ BP-P

DIGITAL POSTAL SCALE



**RICE LAKE®**  
WEIGHING SYSTEMS

800-472-6703  
[www.ricelake.com](http://www.ricelake.com)

# BenchPro™ BP-P

DIGITAL POSTAL SCALE



Large 1 inch  
backlight setting

The BenchPro BP-P digital postal scale is designed to streamline your company's mailing services. Time spent traveling to and from the local post office and waiting in long lines can be costly. Risking returns or spending extra money for postage due to estimates can also hurt the bottom line. Instead of estimating, install a BenchPro BP-P connected directly to the USPS or Canada Post within your company and get a step ahead.

## Dynamic Display

By equipping the BP-P with an additional post-mounted or tabletop display, both the customer and operator can view weight while a transaction takes place. A tempered glass display keypad offers durability in a fast-paced environment while still allowing for maximum visibility.

## Ultimate Scale Durability

Corner and center overload protection keep your postal scale safe from damage caused by accidental overloading.

DIVISIONS (MULTI-RANGE):	
Kg triple range	0-5 kg x 0.001 kg
	0-10 kg x 0.002 kg
	0-35 kg x 0.01 kg
Lb/oz dual range	0-7 lb x 0.05 oz
	0-70 lb x 0.2 oz
DIVISIONS (MULTI-INTERVAL):	
Kg triple interval	0-5 kg x 0.001 kg
	5-10 kg x 0.002 kg
	10-35 kg x 0.01 kg
Lb/oz dual interval	0-7 lb x 0.05 oz
	7-70 lb x 0.2 oz


Please see our website for further details, [www.ricelake.com](http://www.ricelake.com)

## SPECIFICATIONS

<b>DYNAMIC RESPONSE:</b>	Response time for stable weight: 0 - 1,000d, 1,000 ms, maximum mean average 1,000d +, 1,500 ms, maximum mean average
<b>INTERNAL RESOLUTION:</b>	500,000 internal count minimum
<b>OVERLOAD PROTECTION:</b>	Corner & center overload protection
<b>POWER:</b>	
In-line Power Supply (included)	
Input:	100-240 VAC, +10% -15%, 3-wire w/ground Standard terminated with USA 3-prong plug
Output:	12 V at .1 Amps DC minimum
Frequency:	50/60 Hz +/-3 Hz, standard
Power Supply Approvals:	UL, CE, EN, CUL
Battery Type:	Four AA alkaline batteries, 6 V, with low battery indication at 4.3 volts (not included)
Battery Life:	50-250 hrs depending on backlight and auto-shutdown settings
<b>USB HID:</b>	USB 2.0 full speed; Vendor ID: 1C19; Product ID: 0002
<b>CONSTRUCTION:</b>	Die-cast aluminum load bridge and base housing with stainless steel weight platter
<b>DISPLAY:</b>	Minimum key press life of 500,000 cycles, ABS plastic housing 6 annunciators to indicate Zero, Gross/Brutto, Net, W1/W2/W3 multi-range 3 buttons: Units, On/Off, F1
<b>RS-232 CABLE (INCLUDED):</b>	10 ft DB 9-pin male to female, straight pass through
<b>USB CABLE (INCLUDED):</b>	46 in (1,168.4 mm) A/B type USB cable
<b>APPROVALS:</b>	NTEP COC # 17-002 Canada Weights and Measures: AM - 6050 CE Marked
<b>WARRANTY:</b>	Two-year limited warranty

## ADDITIONAL OPTIONS

- Column or Table top Display Post for mounting display
- Customer display

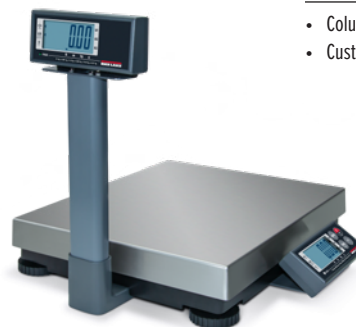

Shown with customer  
display option



Shown with mounted  
display option

SALES AND TECHNICAL ASSISTANCE

**RICE LAKE**  
WEIGHING SYSTEMS

HEADQUARTERS

230 West Coleman Street  
Rice Lake, Wisconsin 54868 - USA  
Tel: (715) 234 9171 | Fax: (715) 234 6967  
[www.ricelake.com](http://www.ricelake.com)