

RICE LAKE
RETAIL SOLUTIONS

ISHIDA

800-472-6703 www.ricelake.com/retail



Uni-9 Series

PC-BASED PRICE COMPUTING SCALE

RICE LAKE
RETAIL SOLUTIONS

ISHIDA



Actual size Uni-9 Bench Model



Feast your eyes on the Uni-9 Series

The Uni-9 Series delivers the gourmet experience in retail weighing and wrapping through a large, vivid display and advanced communication all in a more compact design.



Shown with optional platter

Standard Features

- Dual-range weighing (0-15 x 0.005lb and 15-30 x 0.01 lb)
- PC-based scale operating system allows stores to use the scale browser to enter orders right from the scale, advertise throughout the store with video capabilities, and perform remote diagnostics and maintenance.
- Available in multiple configurations to best suit your store needs, including:

Bench	Self-service
Short pole	Hanging
Pole	Bakery printer
Remote scale	Reduced Operator Display
Elevated	
- Solid State Drive eliminates moving parts to increase the scale's life, consume less power, and speed up data access
- Customer display can play video on either 12.1 inch (800x600) or 7 inch (800x480), bench type only
- Wireless communication, 802.11 b/g
- Intra-net browsing capabilities for order entry, recipe lookup and more
- Fully compliant with RoHS regulations for a completely lead-free machine
- Compatible with third-party communication software, including ADC's InterScale and Invatron's PLUM

Options and Accessories

- Linerless Label Cassette helps reduce waste while nearly doubling the paper stock
- USB scanner
- Cash drawer
- Up to seven label cassettes allow quick label changing
- SD memory card stores transaction data, images and videos
- ScaleLink Pro-5 scale management software, including screen design, label design, data backup and remote diagnostics

MAY.22.2014 (THU) 13:37 1/2

0	NONE
1	United States
2	Canada
3	Mexico
4	Brazil
11	Australia
12	New Zealand
13	Chile
14	Argentina
21	Japan

SEARCH TEXT SEARCH JUMP

Country of Origin

IMAGE 1 MAY.22.2014 (THU) 13:38 2/4

No.	IMAGE	No.	IMAGE	No.	IMAGE	No.	IMAGE
36	FROM THE FRY	45	STOPPED	54	?	63	SHRIMP
37	SEMI-SEMI	46	TRY ME! NEW ITEM	55	FRESH GROUND BEEF	64	SHRIMP
38	BAR-B-QUE	47	Thank You	56	FRESH DAILY	65	SHRIMP
39	100% PORK	48	TODAY'S SPECIAL	57	Thin Sliced	66	SHRIMP
40	100% POULTRY POLLO	49	AMERICAN	58	THICK SLICED	67	COUNTRY STYLE
41	REDUCED FOR QUICK SALE	50	?	59	USDA PRIME	68	PORK
42	?	51	?	60	Family Pack rth	69	COW
43	SPECIAL PRICE	52	Wafer THIN	61	UNIT FAVORITE	70	ISHIDA
44	TENDERIZED	53	100% USDA CHOICE	62	?	71	RICE LAKE RETAIL SOLUTIONS

10 24 36

DETAIL

Image Library



Modern retail settings want more functionality in less space.

Retailers will appreciate the Uni-9's compact design that fits nicely on virtually any size counter, occupying a very small footprint. This PC-based touchscreen scale is available with a seven- or 12-inch LED backlit customer display for stunning promotional images and videos. The PC-based technology together with a crystal-sharp LED display provide more marketing capabilities such as video with sound and product pairing. In addition, more behind-the-counter functions such as store intranet access through a browser, recipe lookup, order entry and training videos reduce the need for additional PCs in all departments.



*Customer side display featuring
an in-store promotion.*

Displays shown at half size



7 inches



12.1 inches

Up to seven different printer cassettes

Once a cassette is installed, the Uni-9 automatically detects correct label format settings, eliminating setup time when changing product. An optional liner-less cassette uses no backing paper, doubling the usable paper amount with less waste, keeping operations green and uninterrupted longer.






Technology means convenience

Network connectivity allows for remote scale management and updates. A frequent-seller feature determines popular items and strategically places them on the user's screen for added convenience and efficiency. Operators will especially find the universal interface of the Uni-9 easy to navigate from any department.

Uni-9 Short Pole Scale/Pole Scale

The pole and short pole models' low-profile base combined with larger display screens is optimal for keeping eye contact with customers and still providing an ergonomic setup for employees. The short pole model is for use on the countertop, providing a 12-inch display for customer view while offsetting an easy-to-use touchscreen display behind the counter. The pole scale model is used behind the counter, providing a raised customer display above the countertop.

PART #	MODEL
151251	Uni-9 short pole with internal RF
151252	Uni-9 pole with internal RF

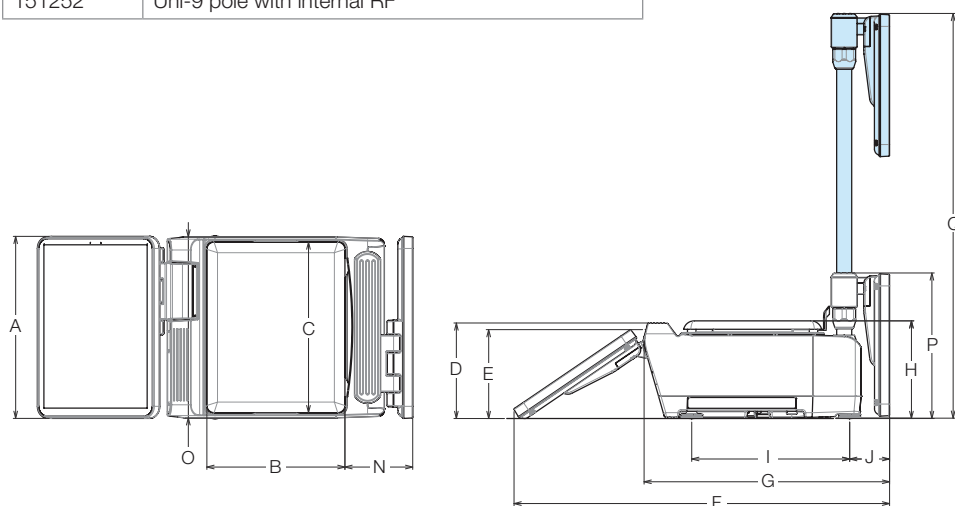

DIMENSIONS SHORT POLE			
A	11.9in (302mm)	I	10.3in (262mm)
B	9.0in (229mm)	J	1.9in (47mm)
C	11.1in (283mm)	K	11.9in (302mm)
D	6.2in (158.5mm)	L	10.6in (268mm)
E	5.8in (147.5mm)	M	10.2in (258mm)
F	24.5in (623mm)	N	4.4in (112.5mm)
G	16.0in (407mm)	O	11.8in (300mm)
H	6.4in (162mm)	P	9.5in (241.5mm)

POLE	
Q	26.5in (671.5mm)



Shown with optional platter

Uni-9 RP Remote Platter


The Uni-9 RP is capable of weighing and wrapping nonstandard sizes and shapes when used in conjunction with a wrapping station. The Uni-9 RP is available in standard 30 lb capacity or optional 60 lb capacity. In addition to a larger capacity option, the Uni-9's PC-based technology allows the scale base to communicate with PCs via Ethernet or Wi-Fi, providing optimal workspace flexibility.

PART #	MODEL	CAPACITY
160266	Uni-9 RP scale with internal RF	0-60lb x 0.01 lb

Uni-9 Bench Scale

The Uni-9 bench scale is available with or without a seven-inch customer display and is ideal for both backroom and front counter operations. This Uni-9 model offers wireless remote operation allowing for more flexible placement of the scale.

PART #	MODEL
170097	Uni-9 bench with internal RF
168873	Uni-9 DB bench with wired LAN

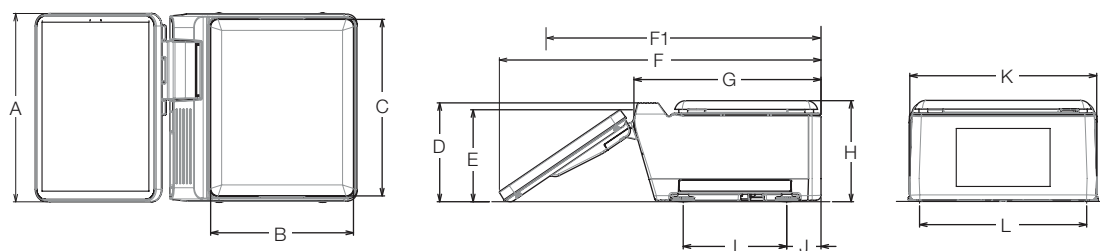

DIMENSIONS BENCH					
A	11.9in (302mm)	E	5.8in (147.5mm)	I	6.5in (166mm)
B	9.0in (229mm)	F	20.3in (516mm)	J	2.2in (55mm)
C	11.1in (283mm)	G	11.8in (300mm)	K	11.8in (300mm)
D	6.2in (158.5mm)	H	6.4in (162mm)	L	10.6in (268mm)

DB MODEL	
F1	16.3in (415mm)



Uni-9 DB




Uni-9 RP pictured with remote scale base and optional wrap station components.



Uni-9 Elevated Displays

The Uni-9's eye-level displays ensure operator focus remains on the customer. Interacting with the touchscreen can be accomplished while maintaining customer eye contact. The screens are adjustable to almost any angle, while the printer and scale base are conveniently mounted at workstation-level.

PART #	MODEL
Consult	Uni-9 elevated display keyboard

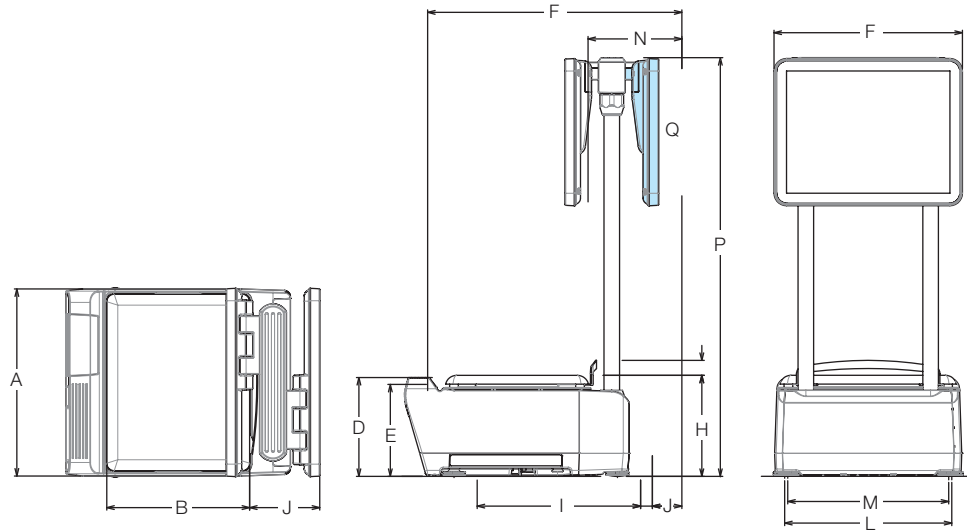


DIMENSIONS ELEVATED KEYBOARD			
A	11.8 in (300 mm)	H	6.4 in (162 mm)
B	9.0 in (229 mm)	I	10.3 in (262 mm)
D	6.2 in (158.5 mm)	J	1.9 in (47 mm)
E	5.8 in (147.5 mm)	K	11.9 in (302 mm)
F	16.1 in (408 mm)	L	10.6 in (268 mm)
		M	10.2 in (258 mm)
		N	5.9 in (150 mm)
		P	26.4 in (671.5 mm)
		Q	Customer Display



Uni-9 Hanging Scale

The suspended ergonomic design of the Uni-9 hanging type follows quickly on the heels of the first color touchscreen hanging scale on the market, Ishida's Uni-7 hanging scale. Ideal for seafood and other high-moisture foods, the suspended design keeps product away from the operator touchscreen, which resounds with a beep when buttons are pressed. Customers and employees alike will find the large 12-inch display easy to read and use.

PART #	MODEL
191674	Uni-9 hanging scale with internal RF

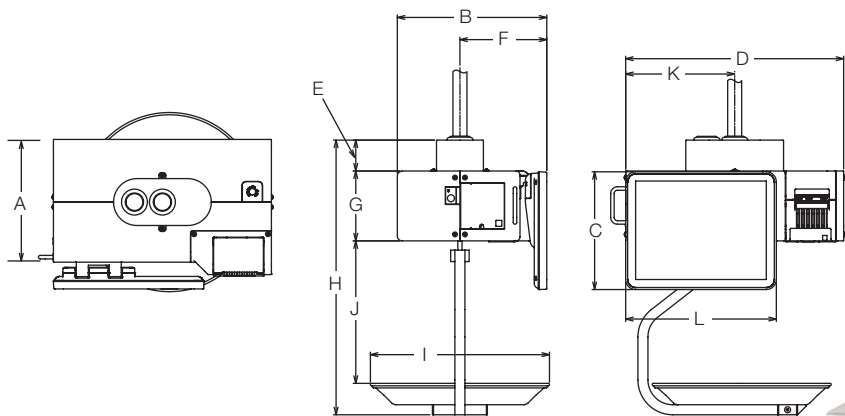

DIMENSIONS			
A	10.7 in (271 mm)	G	5.5 in (140 mm)
B	11.8 in (300 mm)	H	21.7 in (550.5 mm)
C	9.3 in (236 mm)	I	14.1 in (359 mm)
D	17.2 in (437 mm)	J	11.2 in (285.5 mm)
E	2.4 in (62 mm)	K	8.6 in (218.5 mm)
F	6.9 in (174 mm)	L	11.9 in (302 mm)
MOUNTING SPECIFICATIONS			
Pipe: 1.10 in outside diameter			



Specifications (common to all models)

Capacity (Dual Range):

0-15 lb x 0.005 lb, 15-30 lb x 0.01 lb

Print Speed:

3.2 /3.9 /4.7 /5.9 in/sec
(80 /100 /120 /150 mm/sec)

Label Size:

Width: 1.2 in - 2.5 in (30mm - 64mm)
Length: 0.8 in - 7.9 in (20mm - 200mm)

Display:

Operator Side: 12 in (800 x 600) color touch panel
Customer Side: 7 in (800 x 480) or 12 in (800 x 600)
for bench, 12 in for other models
Type: Five-wire resistive

Display Items:

Tare: Four-digits
Unit price: Six-digits
Weight: Five-digits
Total price: Six-digits

Memory:

SSD memory 250MB

Communications:

Static TCP/IP 1G Base T Ethernet (auto-duplex)
Wireless WEP/WPA/WPA2

Input/Output:

LAN 1 channel
USB 4 channel
SD 1 channel (SDHC: MAX 4 GB)
(for transaction data)
Drawer 1 channels
*Barcode Scanner: Ethernet

Operating Voltage:

Range: 100-240 V, 50/60 Hz
Permissible Tolerance: +/- 10%

Operating Environment:

32°F to 104°F (0°C to 40°C)
20-85% relative humidity

Power Supply:

AC100-240V, 50/60 Hz

Power Consumption:

Stand-by: 50W,
In operation: 120W

Classification:

NTEP CC 12-121
UL listed

Warranty:


One-year limited warranty

Approvals:





SALES / PLU 0




APR.09.2014 (WED) 16:58

CHECK THE WEIGHT BEFORE PRODUCTION.
ENTER PLU No. AND PRESS [PLU] KEY.



TARE	lb	ZERO	WEIGHT	lb	UNIT PRICE	\$/lb	TOTAL PRICE	\$
0.000			0.385		0.00		0.00	

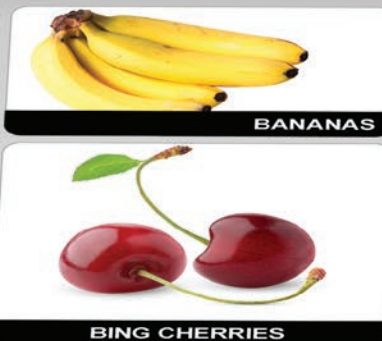

<	TARE	U/P	FIX	→0←
7	8	9	FEED	LABEL BATCH
4	5	6	PLU	⌂
1	2	3	C	🔍
0	00	SUBTOTAL		🖨

VEGETABLES

LEAF
LETTUCE

CITRUS
FRUITS

APPLES



Capacity 0-15lb x 0.005lb 15-30lb x 0.01lb